

Air density (γ): 1.20 kg/m³


Installation type "B": free inlet, ducted outlet

12000 m³/h fan test chamber according to AMCA 210/05 fig. 12

Free field inlet side Lp(A) measurements at 1 m according to ISO 3746:2011

Fan type:	DAIN 10/8 XPL2	Motor code:	SM00109	Motor T.H.:	YES OUT
Test nr.:	1973, 1974	Motor power [W]:	900	Capacitor [μF]:	-
Date:	2016/09/01	Motor poles:	4	Fan max. abs. current [A]:	4,1
Power supply[V]:	400/400 3~	Mot. prot. class:	IP55		
Frequency [Hz]:	50	Mot. ins. class:	F		

Fan ErP status: ErP 2015

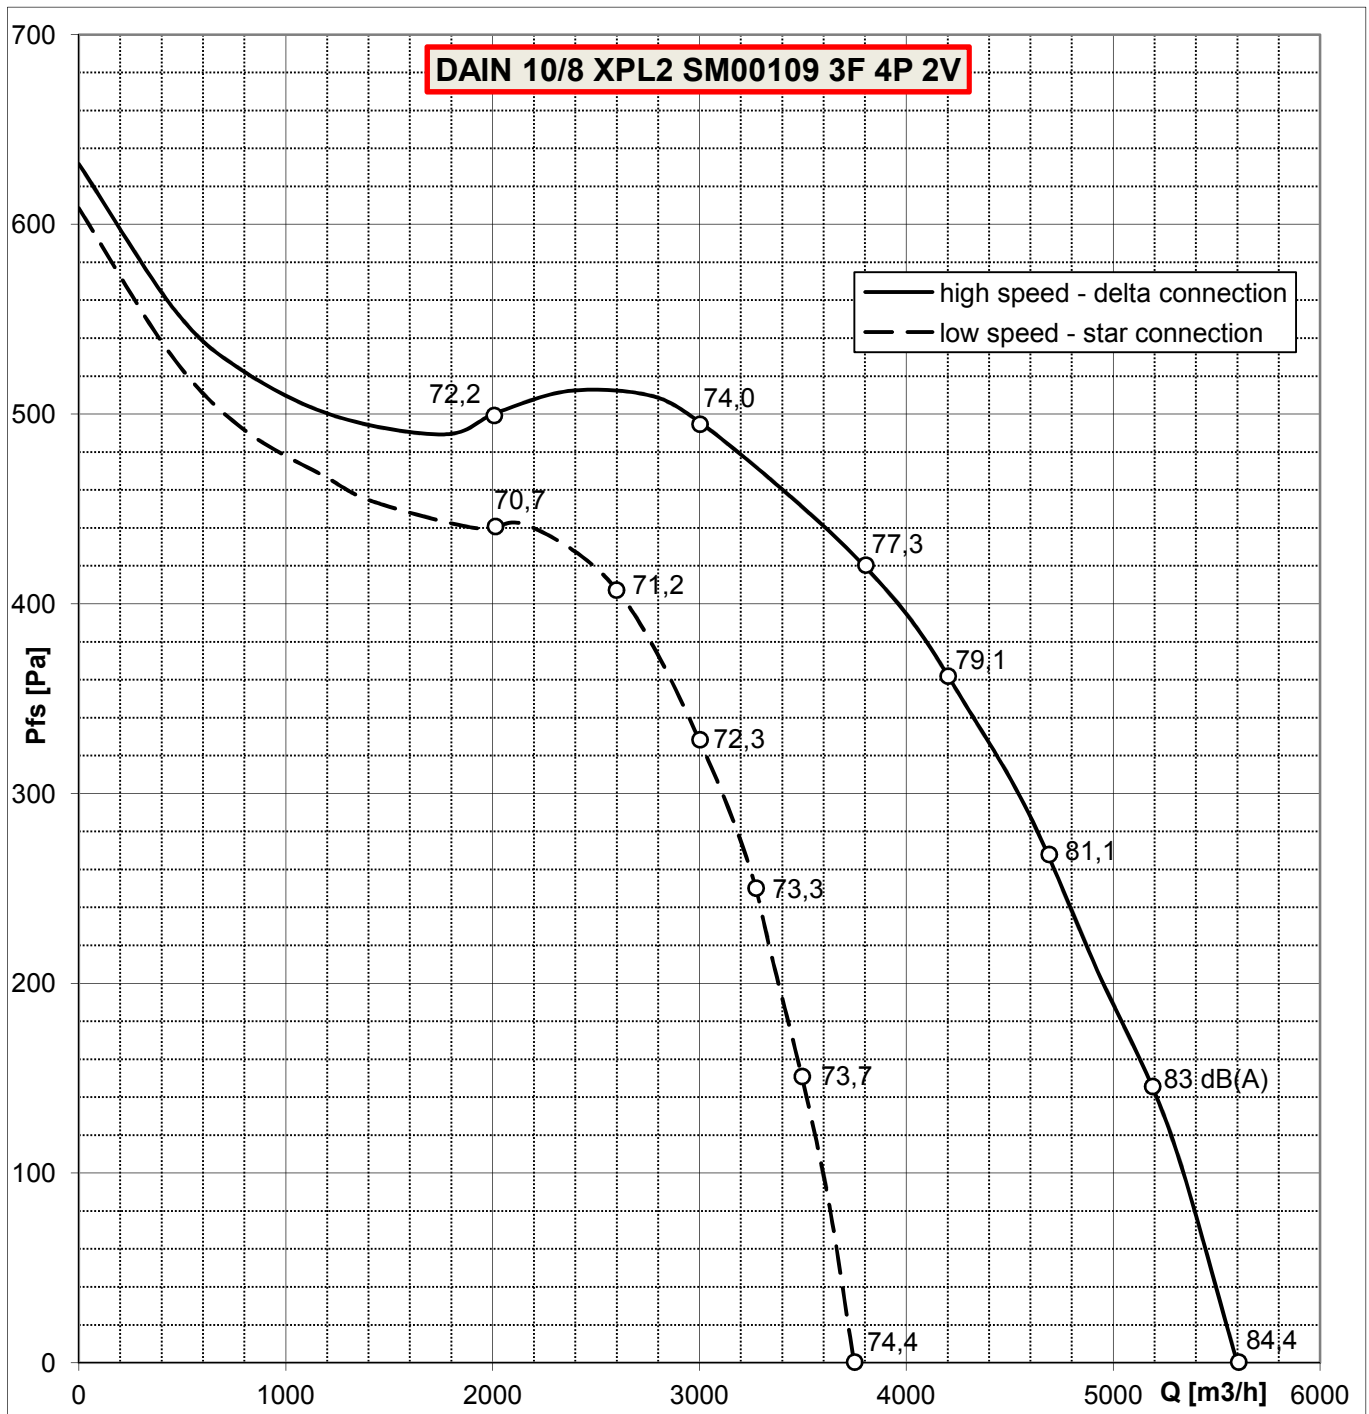

Data are not certified by AMCA